


Panel Profile Indicator for AC and DC



1) scale marked from 4..20mA
and blank from 0..4mA
(price incl. special scale acc. to DIN)

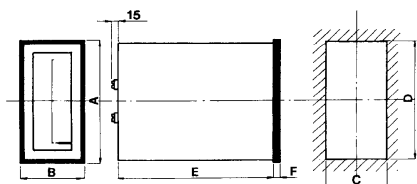

dimensions in mm

Type	A	B	C	D	E	F
PR4824	48	24	21	45,5		
PR7224	72	24	21	69	88	2
PR9624	96	24	22,5	92	95	5
PR9648	96	48	44	93	120	6
PR14472	144	72	68	139	168	5

TECHNICAL DATA

Rectangular panel profile indicator

accuracy (class)	±1,5% (DIN 43 780)
self-consumption: ammeter AC	approx. 1VA (5A)
voltmeter AC	approx. 1VA (100V)
ammeter DC	500mV...60mV
voltmeter DC	approx. 1mA (1000Ω/V)
operating voltage	600V
operating frequency	40...60Hz
test voltage	2kV-50Hz-60s
operating temperature	-10...50°C
storage temperature	-30...70°C
manufactured according to	DIN, VDE, IEC, CEI

Input		Order Code				
		PR4824E	PR7224E	PR9624E	PR9648E	PR14472E
1-1,5-2,5A	AC					
4-5-6-10A	AC					
current transformer						
..1A	AC					
(incl. scale)						
current transformer						
..5A	AC					
(incl. scale)						
25-40-60-100V	AC					
150-250-300V	AC					
400-500-600V	AC					
		PR4824M	PR7224M	PR9624M	PR9648M	PR14472M
100-150μA	DC					
250-400-600μA	DC					
1-1,5-2,5-5-10mA	DC					
15-20-25-40mA	DC					
0..4..20mA ¹⁾	DC					
60-100-150mA	DC					
250-400-600mA	DC					
1-1,5-2,5-4-6A	DC					
60mV - 150mV	DC					
for shunt						
(incl. scale)						
400-600mV	DC					
1-1,5-2,5-4-6-10V	DC					
25-40-60-100-150V	DC					
250-400-500-600V	DC					

Ordering Information

- Order Code
- Measurement Range
- Vertical or Horizontal Scale
- Special scale realizations are possible;
please inform us about the labeling

Langer
MESSTECHNIK

Soyerhofstrasse 16
D-81547 Muenchen
Germany

☎ +49-700-LANGER-01
☎ +49-89 - 69 99 86 78
Fax +49-89 - 69 99 86 79

eMail & Internet:
info@Langer-Messtechnik.de
www.Langer-Messtechnik.de