
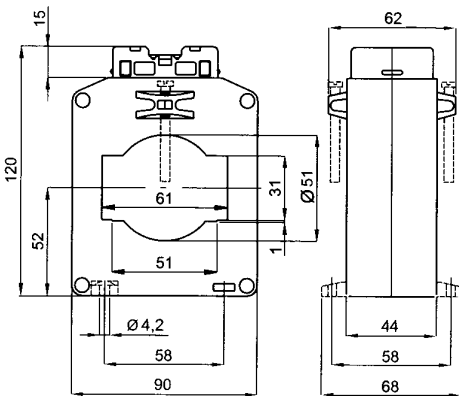



# TAT61

## Current Transformer 90mm Width designed for Busbar 2x60x10mm

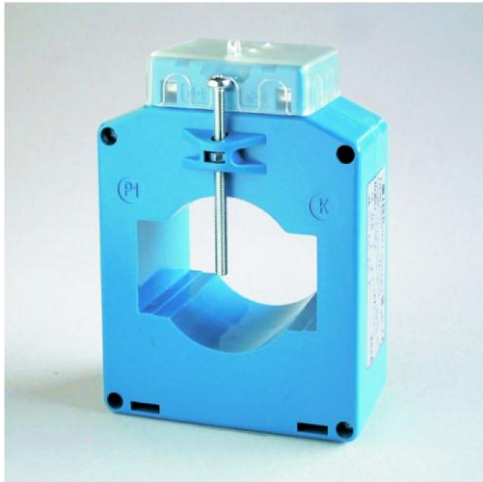

### TECHNICAL DATA

break-proof plastic housing with integrated terminal cover	UL94-V0
self-extinguishing insulation	class E
protection	IP 20
frequency	50...60Hz
current limiting factor	FS 5
thermal short-term current	$I_{th}=60I_n$
dynamic short-term current	$I_{dyn}=2,5 \times I_{th}$
storage temperature	-40...+80°C
operating temperature	-25...+50°C
weight	0,50...1,00kg

Order Code	sec. 5A primary	burden class 0,5	burden class 1,0	burden class 5P5 *)
TAT061300-05	300A		4VA	
TAT061400-05	400A	2VA	6VA	
TAT061500-05	500A	4VA	10VA	
TAT061600-05	600A	6VA	15VA	2VA
TAT061750-05	750A	6VA	15VA	2VA
TAT061800-05	800A	8VA	15VA	3VA
TAT0611K0-05	1000A	10VA	20VA	4VA
TAT0611K2-05	1200A	12VA	25VA	5VA
TAT0611K5-05	1500A	20VA	30VA	6VA
TAT0612K0-05	2000A	25VA	40VA	8VA

Order Code	sec. 1A primary	burden class 0,5	burden class 1,0	burden class 5P5 *)
TAT061300-01	300A		4VA	
TAT061400-01	400A	2VA	6VA	
TAT061500-01	500A	4VA	10VA	
TAT061600-01	600A	6VA	15VA	2VA
TAT061750-01	750A	6VA	15VA	2VA
TAT061800-01	800A	8VA	15VA	3VA
TAT0611K0-01	1000A	10VA	20VA	4VA
TAT0611K2-01	1200A	12VA	25VA	5VA
TAT0611K5-01	1500A	20VA	30VA	6VA
TAT0612K0-01	2000A	25VA	40VA	8VA

### Special Options

- \*) Protection Transformer
- Tropical Design
- Frequency 400Hz
- Special current measuring ranges (on demand)

**Langer**  
MESSTECHNIK

Soyerhofstrasse 16  
D-81547 Muenchen  
Germany

☎ +49-700-LANGER-01  
☎ +49-89 - 69 99 86 78  
Fax +49-89 - 69 99 86 79

eMail & Internet:  
info@Langer-Messtechnik.de  
www.Langer-Messtechnik.de