


TAC10

Wound Current Transformer 85mm Width

designed for 35mm DIN Rail




TECHNICAL DATA

break-proof plastic housing	UL94-V0
self-extinguishing	class E
insulation	IP 30
protection	50...60Hz
frequency	FS 5
current limiting factor	$I_{th}=60I_n$
thermal short-term current	$I_{dyn}=2,5 \times I_{th}$
dynamic short-term current	-40...+80°C
storage temperature	-25...+50°C
operating temperature	0,7...0,9kg
weight	

Order Code	sec. 5A primary	burden class 0,5	burden class 1,0
TAC010005-05	5A	10VA	20VA
TAC010010-05	10A	10VA	20VA
TAC010015-05	15A	10VA	20VA
TAC010020-05	20A	10VA	20VA
TAC010025-05	25A	10VA	20VA
TAC010030-05	30A	10VA	20VA
TAC010040-05	40A	10VA	20VA
TAC010050-05	50A	10VA	20VA
TAC010060-05	60A	10VA	20VA
TAC010080-05	80A	10VA	20VA
TAC010100-05	100A	10VA	20VA
TAC010150-05	150A	10VA	20VA
TAC010200-05	200A	10VA	20VA
TAC010250-05	250A	10VA	20VA
TAC010300-05	300A	10VA	20VA
TAC010400-05	400A	10VA	20VA
TAC010500-05	500A	10VA	20VA
TAC010600-05	600A	10VA	20VA

Order Code	sec. 1A primary	burden class 0,5	burden class 1,0
TAC010005-01	5A	10VA	20VA
TAC010010-01	10A	10VA	20VA
TAC010015-01	15A	10VA	20VA
TAC010020-01	20A	10VA	20VA
TAC010025-01	25A	10VA	20VA
TAC010030-01	30A	10VA	20VA
TAC010040-01	40A	10VA	20VA
TAC010050-01	50A	10VA	20VA
TAC010060-01	60A	10VA	20VA
TAC010080-01	80A	10VA	20VA
TAC010100-01	100A	10VA	20VA
TAC010150-01	150A	10VA	20VA
TAC010200-01	200A	10VA	20VA
TAC010250-01	250A	10VA	20VA
TAC010300-01	300A	10VA	20VA
TAC010400-01	400A	10VA	20VA
TAC010500-01	500A	10VA	20VA
TAC010600-01	600A	10VA	20VA

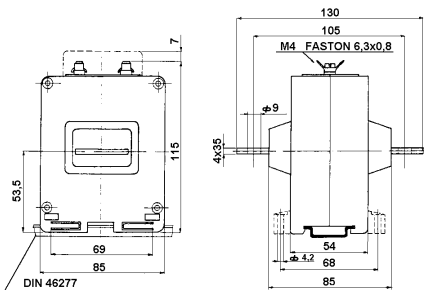

Langer
MESSTECHNIK

Soyerhofstrasse 16
D-81547 Muenchen
Germany

☎ +49-700-LANGER-01
☎ +49-89 - 69 99 86 78
Fax +49-89 - 69 99 86 79

eMail & Internet:
info@Langer-Messtechnik.de
www.Langer-Messtechnik.de