

# TAA081

## Current Transformer with Split Core

designed for Busbar 80x50mm / Cable  $\varnothing$  50mm




### TECHNICAL DATA

break-proof plastic housing with  
integrated terminal cover  
self-extinguishing  
insulation  
protection  
frequency  
current limiting factor  
thermal short-term current  
dynamic short-term current  
storage temperature  
operating temperature  
weight

UL94-V0  
class E  
IP 20  
50..60Hz  
FS 5  
 $I_{th}=60I_n$   
 $I_{dyn}=2,5 \times I_{th}$   
-20..+80°C  
-5..+50°C  
1,00..1,20kg

Order Code	sec. 5A primary	burden class 0,5	burden class 1,0
TAA081250X05	250A	1VA	2VA
TAA081400X05	400A	1,5VA	3VA
TAA081500X05	500A	2,5VA	5VA
TAA081600X05	600A	2,5VA	5VA
TAA081800X05	800A	4VA	5VA
TAA0811K0X05	1000A	5VA	10VA

Order Code	sec. 1A primary	burden class 0,5	burden class 1,0
TAA081250X01	250A	1VA	2VA
TAA081400X01	400A	1,5VA	3VA
TAA081500X01	500A	2,5VA	5VA
TAA081600X01	600A	2,5VA	5VA
TAA081800X01	800A	4VA	5VA
TAA0811K0X01	1000A	5VA	10VA

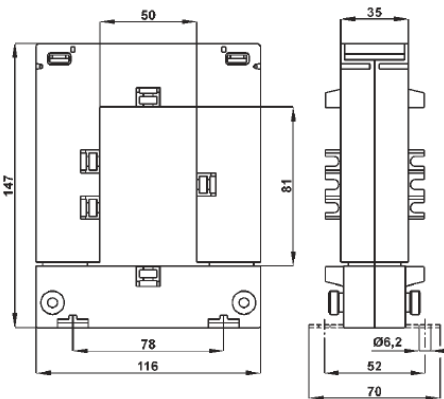

**Langer**  
MESSTECHNIK

Soyerhofstrasse 16  
D-81547 Muenchen  
Germany

☎ +49-700-LANGER-01  
☎ +49-89 - 69 99 86 78  
Fax +49-89 - 69 99 86 79

eMail & Internet:  
info@Langer-Messtechnik.de  
www.Langer-Messtechnik.de