

# TAA121

## Current Transformer with Split Core

designed for Busbar 120x80mm / Cable  $\varnothing$  80mm




### TECHNICAL DATA

break-proof plastic housing with  
integrated terminal cover  
self-extinguishing  
insulation  
protection  
frequency  
current limiting factor  
thermal short-term current  
dynamic short-term current  
storage temperature  
operating temperature  
weight

UL94-V0  
class E  
IP 20  
50..60Hz  
FS 5  
 $I_{th}=60I_n$   
 $I_{dyn}=2,5 \times I_{th}$   
-20..+80°C  
-5..+50°C  
1,30..1,50kg

Order Code	sec. 5A primary	burden class 0,5	burden class 1,0
TAA121800X05	800A	3VA	6VA
TAA1211K0X05	1000A	4VA	8VA
TAA1211K2X05	1200A	5VA	10VA
TAA1211K5X05	1500A	7,5VA	10VA

Order Code	sec. 1A primary	burden class 0,5	burden class 1,0
TAA121800X01	800A	3VA	6VA
TAA1211K0X01	1000A	4VA	8VA
TAA1211K2X01	1200A	5VA	10VA
TAA1211K5X01	1500A	7,5VA	10VA

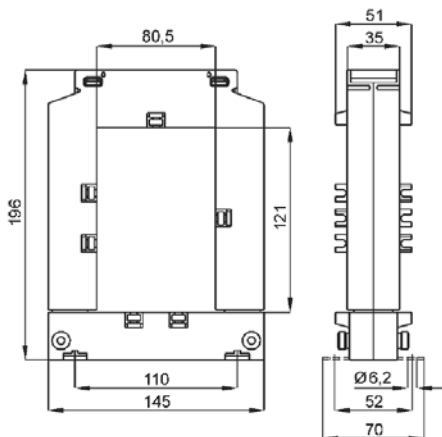

**Langer**  
MESSTECHNIK

Soyerhofstrasse 16  
D-81547 Muenchen  
Germany

☎ +49-700-LANGER-01  
☎ +49-89 - 69 99 86 78  
Fax +49-89 - 69 99 86 79

eMail & Internet:  
info@Langer-Messtechnik.de  
www.Langer-Messtechnik.de