



TTV100

Low-Voltage Transformer

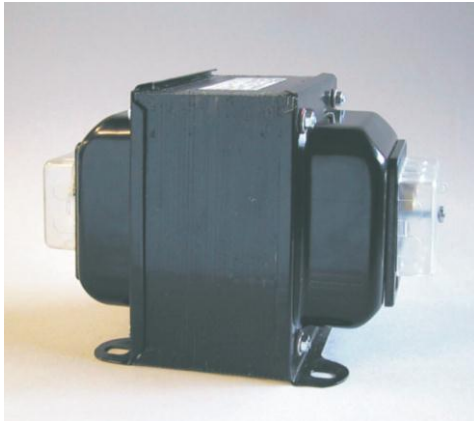


TECHNICAL DATA

metal housing	
insulation	class E
protection	IP 30
frequency	50...60Hz
test voltage	3kV x 1' at 50Hz
continuous overload	1,2 Un
thermal power	6x nominal burden
storage temperature	-40...+80°C
operating temperature	-25...+50°C
weight	approx. 8kg
manufactured according to	IEC/EN 60044-2 VDE-BS, UTE

Order Code	primary	secondary	burden class	burden class
			0,5	1,0
TTV100CO+P+S	100V		100VA	200VA
TTV100CO+P+S	110V	100V : 3	100VA	200VA
TTV100CO+P+S	115V		100VA	200VA
TTV100CO+P+S	220V	110V : 3	100VA	200VA
TTV100CO+P+S	230V		100VA	200VA
TTV100CO+P+S	380V	100V : $\sqrt{3}$	100VA	200VA
TTV100CO+P+S	400V		100VA	200VA
TTV100CO+P+S	440V	110V : $\sqrt{3}$	100VA	200VA
TTV100CO+P+S	500V		100VA	200VA
TTV100CO+P+S	600V	100V	100VA	200VA
TTV100CO+P+S	800V		100VA	200VA
TTV100CO+P+S	1000V	110V	100VA	200VA
TTV100CO+P+S			100VA	200VA
TTV100VCO+P+S	100V : $\sqrt{3}$		50VA	100VA
TTV100VCO+P+S	110V : $\sqrt{3}$	100V : 3	50VA	100VA
TTV100VCO+P+S	115V : $\sqrt{3}$		50VA	100VA
TTV100VCO+P+S	220V : $\sqrt{3}$	110V : 3	50VA	100VA
TTV100VCO+P+S	230V : $\sqrt{3}$		50VA	100VA
TTV100VCO+P+S	380V : $\sqrt{3}$	100V : $\sqrt{3}$	50VA	100VA
TTV100VCO+P+S	400V : $\sqrt{3}$		50VA	100VA
TTV100VCO+P+S	440V : $\sqrt{3}$	110V : $\sqrt{3}$	50VA	100VA
TTV100VCO+P+S	500V : $\sqrt{3}$		50VA	100VA
TTV100VCO+P+S	600V : $\sqrt{3}$	100V	50VA	100VA
TTV100VCO+P+S	800V : $\sqrt{3}$		50VA	100VA
TTV100VCO+P+S	1000V : $\sqrt{3}$	110V	50VA	100VA
TTV100VCO+P+S			50VA	100VA

FASTON 6,3 X 0,8

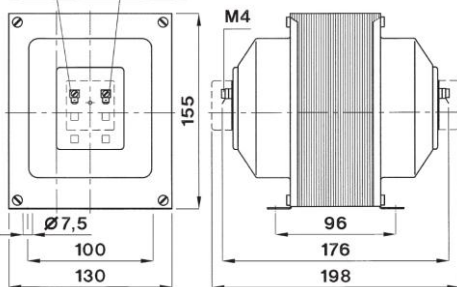

P = primary voltage
S = secondary voltage

Order Information and Special Options

- Order Code plus Primary Voltage / Secondary Voltage
- Tropical Design
- Frequency 400Hz
- Special current measuring ranges (on demand)

Langer
MESSTECHNIK

Soyerhofstrasse 16
D-81547 Muenchen
Germany

☎ +49-700-LANGER-01
☎ +49-89 - 69 99 86 78
Fax +49-89 - 69 99 86 79

eMail & Internet:
info@Langer-Messtechnik.de
www.Langer-Messtechnik.de